
Luxurious Four-Wheel Battery Operated Car

GUIDE BOOK

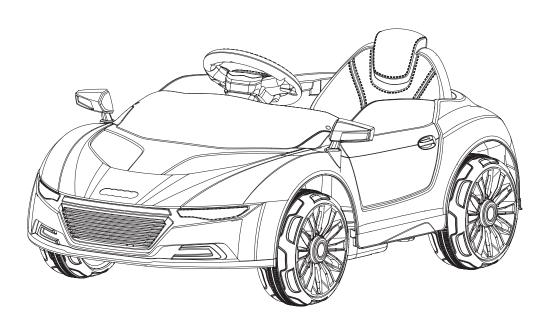

Manual book only for your reference, products features may vary from the pictures in book, configuration based on your order!

• Please read the operating instuctions carefully before using.

| | | Contents |
|-----|------------------------------------|--------------------------|
| 1 E | Brief Instruction and Model | 01 |
| 2 5 | Safety Instruction | 02 |
| 3 F | Packing List | 04 |
| 4 [| Parts Diagram | 05 |
| 5 | Assembly Steps | 06 |
| 6 | How to Operate Your Vehicle | 10 |
| 7 | Charging Your Vehicle | 11 |
| 8 | Caring For Your Vehicle | 11 |
| 9 | Problems and Solution Guide | 11 |
| 10 | Disposal Of Battery | 12 |
| 11 | Special explaintion | 13 |
| 12 | Remote Operation Explanation Brief | 14 Instruction and Model |

Thank you for choosing our vehicle. Each vehicle pattern is designed upon a unique mold: such as the realistically imitated vehicle and cute series, which bring different fun and feeling for your children.

We wish our vehicle to accompany your children for a happy childhood and your family will be filled with joy and happiness.

| Suitable Age | 37-95 Months | Load Capacity | < 25 KG |
|--------------|---|----------------------|---------------------------------|
| Speed | 3-5 KM/H | Size of Car | 106*62*42CM |
| | Input:110 or 220-240v, 50Hz Output:DC 6 V 5 0 0 / 7 0 0 m A Output:DC 1 2 V 7 0 0 m A | | 6 V-4. 5/7Ah*1 6 V-4. 5 Ah*2 |
| Power Way | Charging Type | Charging Time | 8~12 Hours |
| Fuse | 10 /15 A | Average Battery Life | Approximately 300 |

Read carefully and follow all the instructions

MARNING ! CAUTION

Assembly/Used

Product requires adult assembly, Children can be harmed by small parts, sharp edges and sharp points in the vehicle's unassembled state.

Care should be taken in unpacking and assmbly of the vehicle. Children should



not handle parts, or help in assembly of the vehicle. Always properly handled the protective material and poly bags before assembly. Forbidden to children's play and have suffocation danger!



Suitable for age 37~95 months; Maximum user weight is 25 Kgs.



Choking hazard----small parts. This product is forbidden to children under 3 years.



Direct Adult Supervision Required. Never leave child unattended by himself. Always keep child in view when he is in vehicle. Teach appropriate safety rules to your child before allowing operation of this vehicle. These rules should also be reviewed with other playmates who want to drive this vehicle. Make sure children know and follow these rules for safe driving and riding:

- Always wear shoes;
- Always sit on the seat;
- Always wear a helmet when riding;
- Only one rider at a time.
- The toy should be used with caution since skill is required to avoid falls or collisions causing injury to the users or third parties.



Keep children within safe riding areas, these areas must be:

- A Away from steps/cars/driveways/roads and alleys;
- B Away from sloped/inclined surfaces/swimming pools or other bodies of water;
- C Away from other dangerous places;
- D Only outdoors. Generally flat ground/playground /Garden asphalt and other hard surfaces;
- Never use in the dark. A child could encounter unexpected obstacles and have an accident. Operate the vehicle only in the daytime or a well-light area.



Before using, adult should check the main components whether in good condition:

Battery plug should been plugged in, power is switched; battery/charge/wire/plug/car body and other parts whether is damage; whether screw loose; whether have another demage problems. To avoid using damaged car until it repaired.



To avoid demaging the motors and gears, stop the vehicle before shifting from forward to backward switch.

- Please turn forward/stop/backward switch to "O" in the state of no-driving. Turn off power switch.(notice:this switch only control the parts of drive.)
- Do not let any child touch the wheels or near them when the car is moving.
 - This vehicle has adjustable play seat belts. Please instruct children how to tie the safety belt before using, guarantee the securit
- Do not tow anything behind the vehicle or overload it, do not exceed the maximum weight capacity of 25 kgs.

Battery / Charger / Alkaline Batteries

The battery/ charge/ alkaline batteries are not toy, strictly children play.

Non-rechargeable batteries are not to be recharged. Do not charge non-rechargeable batteries.

Do not mix old and new batteries or batteries of different types: alkaline, standard (carbon-zinc) or rechargeable (nickel-cadmium).

Battery charging must be done by adults only.

Remove rechargeable batteries from the vehicle before charging.

Insert batteries are correct polarity inside the battery compartment.

⊕ D.C1.5V(SIZE:AA)

D.C1.5V(SIZE:AA)

Remove exhausted batteries from the product.

Remove batteries during long periods of non-use.

Never short-circuit the battery terminals.

Use only with manufacturers prescribed rechargeable battery and charger.

DO NOT use the battery or charger for any other product. Could cause overheating, fire or explosion.

 \sum DO NOT open the battery and the charger.

DO NOT charge battery upside down.

Always maintain battery dry. Do not let the vehicle contact fresh water or salt water.

Charge

Charge 4-6 hours before the first time using, but not charge over 10 hours.

Only adult may handle or charge the battery. Never allow child to do that.

Turn off power switch before charge the batteyr.

When the vehicle's normal speed apparent slow down or after each use, recharge the battery for 8-12 hours, never charge the battery longer than 18 hours.

Examine the battery, charger and their connectors for excessive wear or damage each time you charge the battery. If damage or excessive wear is detected, do not use the charge or the battery until you have replaced the worn or damaged parts.


Charge the battery in a dry area ONLY.

It is normal that charger and battery are tepid while charging.


Charge the battery at least once per month, even if the vehicle has not been used.

In room temperature below 5 degrees centigrade, charging the actual to lengthen 3-5 hours. Below -5 Celsius please do not use this product.

Please identify all parts before assembly and save all packaging materials until assembly is complete.

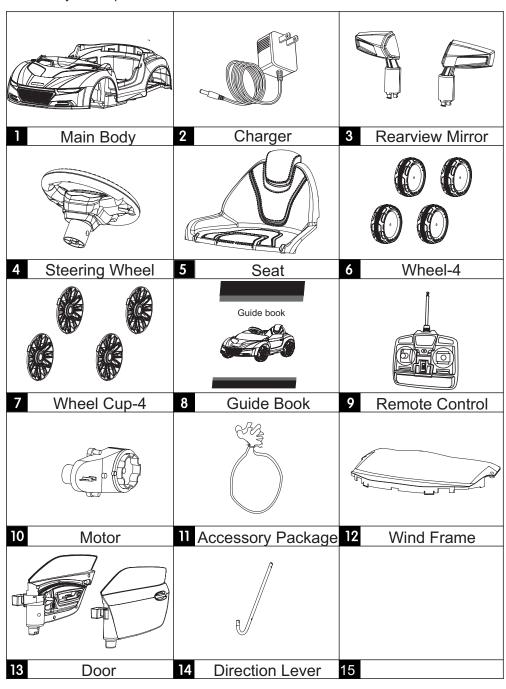

Assembly must be done by adults, it almost takes 20 minutes. Notice: Some parts should be assembled on both sides.

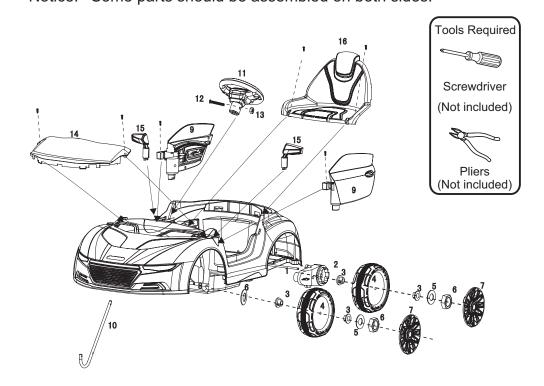


| 1 | Rear Axle | 11 | Steering Wheel | |
|----|-----------------|----|-----------------|--|
| 2 | Motor | 12 | M5*33 Screw | |
| 3 | 10 Bushing | 13 | M5 Screw | |
| 4 | Wheel | 14 | Wind Frame | |
| 5 | Washer | 15 | Rearview Mirror | |
| 6 | Screw | 16 | Seat | |
| 7 | Hubcap | 17 | | |
| 8 | Front Axle | 18 | | |
| 9 | Door | 19 | | |
| 10 | Direction Lever | 20 | | |
| | | | | |


l05

Notice:

- 1 Loosen the two screws in the seat cover position of vehicle body. Unplug the wire connector from the gear box connector, take out motor and charger.
- 2 When in assembling any wheel to the axles, we provide two gaskets. Please decide whether to increase gaskets to adjust tightness degree of the wheels free to turn. Motor should be assembled as the mark on the car body prompts

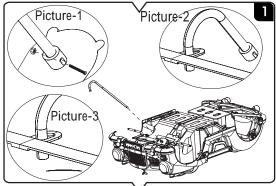

2 On the right after turning over the car Bushing Motor Nut **9 (1)** Hubcap Decoration Washer Hubcap Wheel



Driving Connection Assembly

- Turn the vehicle body over
- Insert direction lever into the white hole in the gear motor.(P-2) Make the directionlever pass through the instrument panel. Direction lever must be inserted into the hole.(P-3)
- The hole on the directionlever should be inserted into the hole of the motor then use M4*22 round screws fix the gear motor tightenly.(P-1)


Driving Wheel Assembly

- Inserting rear axle from the right side to the left side, assembling spare parts according to the picture at left.
- Motor → Bushing → Wheel → Bushing → Washer → Nut → Hubcap Decoration → Hubcap
- If two motors, the assembly way is the

(If single motor, assembling on the left side which is marked "L", if two motors, the marks "L" and "R" on the motor and car body should be corresponding)


(Be sure that bushing is put into the wheel completely)

On the left after turning over the car

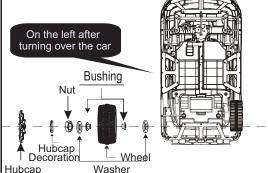


Another Rear Wheel Assembly

- Assembling accroding to the picture at left.
- Washer → Bushing → Wheel → Bushing
 - → Washer→ Nut → Hubcap Decoration
 - → Hubcap

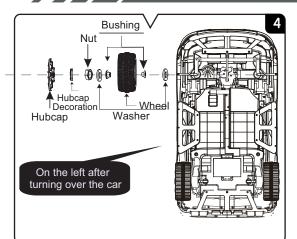


Front Wheel Assembly

- Assembling accroding to the picture at left.
- Washer→ Bushing→Wheel→ Bushing
 →Washer→Nut→Hubcap Decoration →
 Hubcap

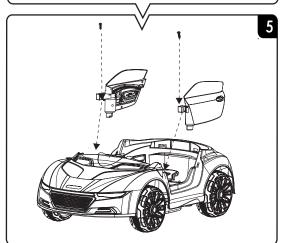


Car Door Assembly

- Inserting the car door into the right place on the car.
- Using the screw to tighten the car door and the car.

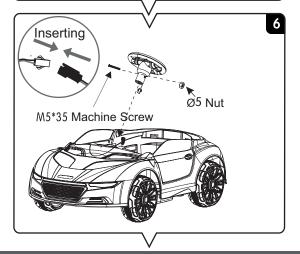


Steering Wheel Assembly

- Screwing off machine screw on the steering wheel
- Inserting steering wheel into direction lever, then using the machine screw to tighten.

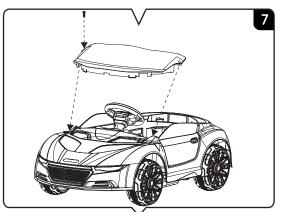


Wind Frame Assembly

 Pressing the wind frame into the right place on the car, then using screw to tighten

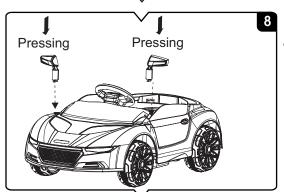


Rearview Mirror Assembly

 Pressing the wind frame into the right place on the car until hearing the "crack", then using screw to tighten.

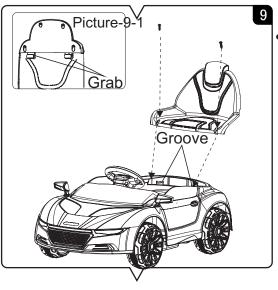


Seat Assembly

 Remove the screw from the car for using, pressing the seat into the right place according to picture-9-1 then using the screw to tighten the car and the seat.

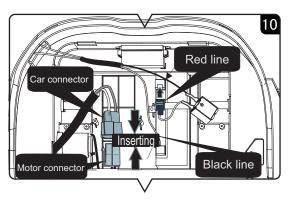

Connecting Motor Line


 Inserting red wire into red column (Avoiding inserting into the black column)

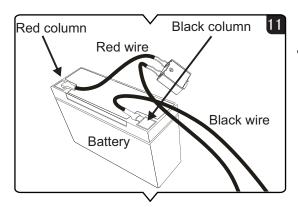

Connecting Battery Line

 Inserting red wire into red column (Avoiding inserting into the black column) Notice: When you changing the tap position, please make sure the vehicle has completely stopped, otherwise it will damage the gear box and the motor.

If using the remote control operation, please refer to guide book page 14.

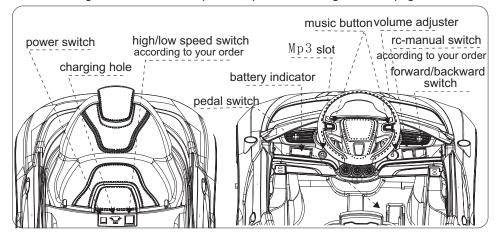

power switch, forward/backward switch, rc manual switch, high/low speed switch are on the instrument platform, pedal switch is on the right.

Press the power switch to open, it will turn off if press again

Battery indicator: If you bought one battery, one motor, the highest volt is 6.54V. When the volt is

under 6V, you have to charge the car.

If you bought two batteries, two motors, the highest volt is 13.1V. When the volt

is under 12V, you have to charge the car. Forward

Pedal switch

- 1. Press the manual button
- 2. Press the forward button
- 3. Tread the pedal, the car will move forward

Backward

- 1. Press the manual button
- 2. Press the backward button
- 3. Tread the pedal, the car will move backward

- Remote control 1. Press the rc button
 - 2. Then adults can control the direction of the car

High/low speed switch (according to your order)

Press the high/low speed switch into high or low speed Press the forward/backward switch into forward or backfard position Tread the pedal, the car will move forward or backward in high or low speed When using remote control, switch the high/low speed into high or low speed to control the car(high/low speed switch is an optional choice, according to your order)

For children's safety, parents should be sure your children have good driving skills when driving in high speed.

Turn on the power botton, inserting Mp3/Mp4 wire into Mp3 slot, then adjusting the volume adjuster as you like.


Music


Press the music botton, music will be played. If there is no more press, music will stop automatically




Do not be close to the ear, improper use can cause hearing damage.

Charge







- 1. Plug the charge port into the input socket;
- 2 Plug the charger into a wall outlet. The battery will begin charging.

Caring For Your Vehicle

- 1. Vehicle body is modeled by polypropylene. Solarize or in -15°C use are strictly prohibited. Vehicle should be far away from hot objects, like an oven and heate plastic parts may melt beside.
- Avoid operating the vehicle in wet or snowy conditions, and do not spray the car
 with a hose. Do not wash the vehicle with soap and water. Water or moisture in the
 motors or electrical switches can cause them to corrode and can cause switch or
 motor failure.
- Avoid operating the vehicle on sand, loose dirt or gravel. Sand, loose dirt or gravel in the motors or electrical switches can case them to jam, and could cause switch or motor failure.
- 4. The vehicle can be wiped down with a soft, dry cloth for a shiny finish, you can wipe plastic parts with a non-wax furniture polish applied to a soft-cloth. Do not use automotive wax. Do not use soap or water or spray the vehicle with a hose.
- 5. Do not modify the electric system. When the fault oppears and they must be maintained by professional. Alterations could cause a fire resulting in serious injury and can also ruin the electrical system.
- 6. Use for about half month, check the wheels turning agilely or not, motor work is normal or not. Using infuse lube to lubricate moving parts.


Problems and Solutions Guide

Problem The vehicle does not run

•Cause: The battery may low on power.

Afrer each use and once a month minimun, charge the battery for 8-12 hour. Do not charge over 18 hour.

Cause: Thermal fuse has tripped. The vehicle is equipped with a self-resetting fuse. When the vehicle is overloaded or operated incorrectly, the self-resetting fuse will be cut off for 2 minutes before becoming operational again. The self-resetting fuse is under the seat(refer to the picture)

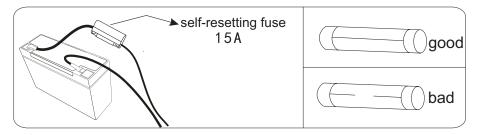

- Cause: battery connector or wires are loose
 Make sure the battery connectors are firmly plugged in to each other.
- Cause: battery is dead
 Please contact retailer or manufacturer.

- Cause: electric system is damaged
 - Please contact retailer or manufacturer.
- Cause: motor is damaged

The motor needs professional repair. Please contact retailer or manufacturer.

Problem: The battery will not recharge

- Cause: battery connector or adapter connector is loose.
 Make sure the battery connector and adaptor are firmly plugged together.
- Cause: charger is not plugged in.
 Make sure the charger is plugged into the wall outlet and the power flow to the outlet is on.
- Cause: charger is not working Is the charger warm while charging? If not, the charger may be broken and please connect retailer and manufacturer.

Problem: The vehicle does not run very long

Cause: battery may be undercharged You may not be charging the battery long enough. After each use, or once a month minimum, charge the battery for 8-12 hour. Do not charge over 18 hour.





- Do not throw into a fire. The battery may explore or leak.
- Your sealed lead-acid battery must be recycled or disposed of in an environmentally sound manner.
- Return an exhausted battery to your local approved lead-acid battery recycle.





Warnings

- 1. The product is not a transport, do not drive on the street, using the product under adult's guardianship.
- 2. Do not allow children under 36 months use the product.
- 3. Overage and overload are forbidden. Maximum load: 25KG.
- 4. The car should be assembled and checked by adults, guarantee safety before using.
- 5. Do not wash the product with water, wiping the car using a soft wet cloth only.
- 6. Battery charging should be handled by adult only, the charging is not toy, do not let children play the charger.
- 7. Driving on public avenue, street, slope, pool side, stair head and other danger area are strictly forbidden.
- 8. Do not use this product in high-voltage line, trandfprmer station, gas station, hospital.
- 9. Must use this product with shoes, with safe-belt.
- 10. Please read carefully and keep this manual book for your children's safety.
- 11. In order to prevent a child from suffocation, keep plastic bags away from children.
- 12. Only audlt can operate the remote chontrol, and must keep distance within 10m for remote control and car. In the same place, must not have two or two above cars using remote control.


Remote Control Operation



Only audits can use remote control

Remote control assembly: Insert the antenna to remote control's upper hole, tighten the remote antenna, make elongatest and turn to sky, also make the received remote antenna straighten.

Battery assembly: remove the screw from the remote control's battery cover, open the cover, put two AA batteries(not included) into it according to the direction of the +/-, then put the battery cover.

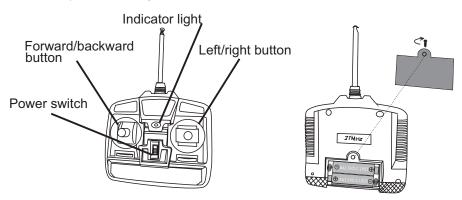

How to use the remote control:

- 1. Put on batteries, open the "power" button, outstretch the remote antenna, then can operate the remote control.
- 2. Pish the "forwasrd/backward button" to the front, the vehicle goes forward, pull the button to the back, the vehicle goes backward.
- 3. Push the "left/right button" to the left, the car turns left, pull the button to the right, the car turns right.
- 4. With the operation of remote control's left and right button together, make driving more interesting.
- 5. Do not use this product in high-voltage line, transformer station, gas station, hospital.
- 6. Only adults can operate the remote control, and must keep distance within 10m for remote control and car. In the same place, must not have two or teo above cars using remote control.
- 7. When use the remote control to turn left/right, the button couldn't push more than 10 seconds, otherwise will burn the gear motor
- 🕲 All b
 - All buttons on the remote control play together will be more fun.
- If the battery is short of engery, the remote control only can control forward, cannot control turning. Please replace new battery.
- When under remote control condition, please do not step on pedal switch, or may effect the car normal playing.



Please do not play the car at these areas: highline, transformer substation, gas station, hospital



Remote control only can operate by adults. Remote control distance is 10 meters. One area can only play one car, two cars may interference each other.